

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61F 13/15		A1	(11) International Publication Number: WO 00/59427
			(43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/US00/40078		(72) Inventors: COLMAN, Charles, Wilson; 2611 Shadow Woods Circle, Marietta, GA 30062 (US). GLAUG, Frank, Steven; 110 Crimson Place, Chester Springs, PA 19425 (US). HUANG, Yung, Haiang; 2420 West Seneca Drive, Appleton, WI 54914 (US). JACKSON, David, Martin; 9825 Summer Oaks Drive, Roswell, GA 30076 (US). KERINS, John, Edward; 529 Riford Road, Neenah, WI 54956 (US). LARSON, Jennifer, Cappel; 1545 Maricopa Drive, Oshkosh, WI 54904 (US). MEYER, Mary, Jo; 737 Manchester Road, Neenah, WI 54956 (US). MUMICK, Pavneet, Singh; Apartment #5, 1514 Schaefer Circle, Appleton, WI 54915 (US). NORTMAN, Brian, Keith; 2249 Wintergreen Drive, Appleton, WI 54914 (US). POMPLUN, William, Seal; 1873 Brookfield Drive, Neenah, WI 54956 (US). TSAI, Fu-Jya; 2517 Gatewood Drive, Appleton, WI 54915 (US). WEYENBERG, Susan, Marie; 318 West Winnebago Street, Appleton, WI 54911 (US).	
(22) International Filing Date: 31 March 2000 (31.03.00)			
(30) Priority Data: 09/285,595 3 April 1999 (03.04.99) US			
(71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).		(74) Agents: ROBINSON, James, B. et al.; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).	
		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: **WATER DISPERSIBLE PANTILINER**

(57) Abstract

Disclosed herein is a water dispersible pantiliner which has a triggerably dispersible body side facing liner, a garment side facing baffle, and, optionally, a triggerably dispersible absorbent core disposed between the liner and baffle. The garment baffle may be biodegradable. In one embodiment, the invention has a peel strip overlaying a garment attachment adhesive layer which adhesively attaches the peel strip to the clothing of a wearer on one side and to one side of a baffle on the other. The baffle is in turn attached on a second side to a body facing side with a construction adhesive. The body facing side may be made from multiple layers such as a body side liner and absorbent layer.

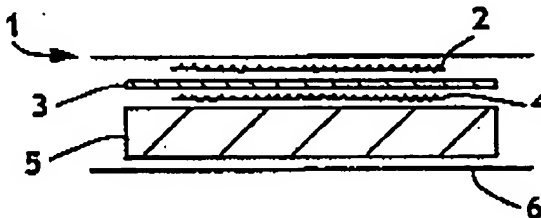

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/59427

PCT/US00/40078

WATER DISPERSIBLE PANTILINER**FIELD OF THE INVENTION**

5 The present invention relates to a personal care product. More particularly, the present invention relates to a water dispersible pantiliner or similar product for personal use.

BACKGROUND OF THE INVENTION

10 Discretion, ease and convenience of disposability are important features of single use personal care products like feminine hygiene products. Likewise the goals of minimization of odor and reduction in solid waste, (since such products are typically disposed of in a landfill) are advanced by making products which are flushable. The ability to flush personal care products in a toilet also helps deliver any bodily waste products contained in the
15 product to the waste treatment facility for proper treatment.

 In order to meet these consumer desires, a number of attempts have been made to provide a product which will disperse in the water in a toilet. US Patent 3,550,592, for example, attempts to provide a flushable sanitary napkin by making the structure of calcium alginate and adding sodium carbonate, or some other weak base, to the toilet water. The
20 base would be provided with the napkin at time of purchase and added to the toilet water by the user at time of disposal.

 US Patent 5,681,299 describes a product in which the backing dissolves sufficiently to become detached from the rest of the product, when placed in a large amount of water (e.g.: a toilet). The absorbent core then becomes a slurry which will pass through sewage piping.
25 The liner does not dissolve but is small enough to pass through the piping.

 US Patent 5,722,966 describes a product having a fibrous top and bottom sheet and

WO 00/59427

PCT/US00/40078

an absorbent core which are dispersible in water. The various materials used in the product are not triggerably dispersible.

Other attempts at providing flushable personal care products have focused on single use disposable diapers.

5 Current commercially available pantliners may be flushed in a toilet, and, because they are quite small, will pass through the toilet fixture into the waste system piping. These pantliners do not disperse, however, so they remain intact and retain the potential to clog the disposal system any opportune, and probably most inaccessible, point.

There remains a need for a personal care product in which all of the components are
10 amenable to disposable by flushing in a toilet and which disperse relatively completely upon flushing or which are small enough to pass through the waste piping system without incident. Such a process should occur fairly quickly, without the requirement of agitation by the user or the addition of chemicals by the user. It is an object of this invention to provide a flushable pantliner and similar items which will disperse to a great extent in the water of a
15 toilet.

SUMMARY OF THE INVENTION

The present invention is directed to a water dispersible pantliner which can
20 successfully be transported through a municipal sewerage system, passing through the toilet, system piping and pumps without incident (e.g. without clogging). It can be treated at a sewerage treatment facility without causing negative effects upon the chemical, biological or other methods of waste treatment used.

The objects of the invention are met by a water dispersible pantliner which has a
25 triggerably dispersible body side facing liner, a garment side facing baffle, and, optionally, a triggerably dispersible absorbent core disposed between the liner and baffle. The garment

WO 00/59427

PCT/US00/40078

baffle may be biodegradable.

In one embodiment, the invention has a peel strip overlaying a garment attachment adhesive layer which adhesively attaches the peel strip to the clothing of a wearer on one side and to one side of a baffle on the other. The baffle is in turn attached on a second side to a body facing side with a construction adhesive. The body facing side may be made from multiple layers such as a body side liner and absorbent layer.

All components of the pantiliner are substantially dispersible in water or, after detaching from the item are so small, that the pantiliner may be disposed of after use by flushing in a toilet.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The Figure is a schematic side elevation showing a peel strip 1 which adhesively attaches by means of a garment attachment adhesive 2 to a barrier film or baffle layer 3 on one side. The other side of the baffle 3 attaches to an absorbent layer 5 with construction adhesive 4. The absorbent layer 5 attaches to the body side liner 6.

DEFINITIONS

As used herein and in the claims, the term "comprising" is inclusive or open-ended and does not exclude additional unrecited elements, compositional components, or method steps.

As used herein the term "nonwoven fabric or web" means a web having a structure of individual fibers or threads which are interlaid, but not in an identifiable manner as in a knitted fabric. Nonwoven fabrics or webs have been formed from many processes such as for example, meltblowing processes, spunbonding processes, and bonded carded web

WO 00/59427

PCT/US00/40078

processes. The basis weight of nonwoven fabrics is usually expressed in ounces of material per square yard (osy) or grams per square meter (gsm) and the fiber diameters useful are usually expressed in microns. (Note that to convert from osy to gsm, multiply osy by 33.91).

As used herein the term "spunbonded fibers" refers to small diameter fibers which
5 are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced as by, for example, in US Patent 4,340,563 to Appel et al., and US Patent 3,692,618 to Dorschner et al., US Patent 3,802,817 to Matsuki et al., US Patents 3,338,992 and 3,341,394 to Kinney, US Patent 3,502,763 to Hartman, and US Patent
10 3,542,615 to Dobo et al. Spunbond fibers are generally not tacky when they are deposited onto a collecting surface. Spunbond fibers are generally continuous and have average diameters (from a sample of at least 10) larger than 7 microns, more particularly, between about 10 and 20 microns. The fibers may also have shapes such as those described in US Patents 5,277,976 to Hogle et al., US Patent 5,466,410 to Hills and 5,069,970 and
15 5,057,368 to Largman et al., which describe fibers with unconventional shapes.

As used herein the term "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity, usually hot, gas (e.g. air) streams which attenuate the filaments of molten thermoplastic material to reduce their diameter,
20 which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed, for example, in US Patent 3,849,241 to Butin et al. Meltblown fibers are microfibers which may be continuous or discontinuous, are generally smaller than 10 microns in average diameter, and are
25 generally tacky when deposited onto a collecting surface.

As used herein, the term "coform" means a process in which at least one meltblown

WO 00/59427

PCT/US00/40078

diehead is arranged near a chute through which other materials are added to the web while it is forming. Such other materials may be pulp, superabsorbent particles, natural polymers (for example, rayon or cotton fibers) and/or synthetic polymers (for example, polypropylene or polyester) fibers, for example, where the fibers may be of staple length.

5 Coform processes are shown in commonly assigned US Patents 4,818,464 to Lau and 4,100,324 to Anderson et al. Webs produced by the coform process are generally referred to as coform materials.

As used herein the term "conjugate fibers" refers to fibers which have been formed from at least two polymers extruded from separate extruders but spun together to form one

10 fiber. Conjugate fibers are also sometimes referred to as multicomponent or bicomponent fibers. The polymers are usually different from each other though conjugate fibers may be monocomponent fibers. The polymers are arranged in substantially constantly positioned distinct zones across the cross-section of the conjugate fibers and extend continuously along the length of the conjugate fibers. The configuration of such a conjugate fiber may be,

15 for example, a sheath/core arrangement wherein one polymer is surrounded by another or may be a side by side arrangement, a pie arrangement or an "islands-in-the-sea" arrangement. Conjugate fibers are taught in US Patent 5,108,820 to Kaneko et al., US Patent 4,795,668 to Krueger et al., US Patent 5,540,992 to Marcher et al. and US Patent 5,336,552 to Strack et al. Conjugate fibers are also taught in US Patent 5,382,400 to Pike

20 et al. and may be used to produce crimp in the fibers by using the differential rates of expansion and contraction of the two (or more) polymers. Crimped fibers may also be produced by mechanical means and by the process of German Patent DT 25 13 251 A1. For two component fibers, the polymers may be present in ratios of 75/25, 50/50, 25/75 or any other desired ratios. The fibers may also have shapes such as those described in US

25 Patents 5,277,976 to Hogle et al., US Patent 5,466,410 to Hills and 5,069,970 and 5,057,368 to Largman et al., which describe fibers with unconventional shapes.

WO 00/59427

PCT/US00/40078

As used herein the term "biconstituent fibers" refers to fibers which have been formed from at least two polymers extruded from the same extruder as a blend. The term "blend" is defined below. Biconstituent fibers do not have the various polymer components arranged in relatively constantly positioned distinct zones across the cross-sectional area of the fiber and the various polymers are usually not continuous along the entire length of the fiber, instead usually forming fibrils or protofibrils which start and end at random. Biconstituent fibers are sometimes also referred to as multiconstituent fibers. Fibers of this general type are discussed in, for example, US Patents 5,108,827 and 5,294,482 to Gessner. Bicomponent and biconstituent fibers are also discussed in the textbook Polymer Blends and Composites by John A. Manson and Leslie H. Sperling, copyright 1976 by Plenum Press, a division of Plenum Publishing Corporation of New York, ISBN 0-306-30831-2, at pages 273 through 277.

"Bonded carded web" refers to webs made from staple fibers which are sent through a combing or carding unit, which breaks apart and aligns the staple fibers in the machine direction to form a generally machine direction-oriented fibrous nonwoven web. Such fibers are usually purchased in bales which are placed in a picker which separates the fibers prior to the carding unit. Once the web is formed, it then is bonded by one or more of several known bonding methods. One such bonding method is powder bonding, wherein a powdered adhesive is distributed through the web and then activated, usually by heating the web and adhesive with hot air. Another suitable bonding method is pattern bonding, wherein heated calender rolls or ultrasonic bonding equipment are used to bond the fibers together, usually in a localized bond pattern, though the web can be bonded across its entire surface if so desired. Another suitable and well-known bonding method, particularly when using bicomponent staple fibers, is through-air bonding.

"Airlaying" is a well known process by which a fibrous nonwoven layer can be formed. In the airlaying process, bundles of small fibers having typical lengths ranging

WO 00/59427

PCT/US00/40078

from about 6 to about 19 millimeters (mm) are separated and entrained in an air supply, and then deposited onto a forming screen, usually with the assistance of a vacuum supply. The randomly deposited fibers then are bonded to one another using, for example, hot air or a spray adhesive. Examples of airlaying technology can be found in

5 US Patents 4,494,278, 5,527,171, 3,375,448 and 4,640,810.

As used herein, through-air bonding or "TAB" means a process of bonding a nonwoven bicomponent fiber web in which air which is sufficiently hot to melt one of the polymers of which the fibers of the web are made is forced through the web. The air velocity is between 100 and 500 feet per minute and the dwell time may be as long as 6 seconds.

10 The melting and resolidification of the polymer provides the bonding. Through air bonding has relatively restricted variability and since through-air bonding (TAB) requires the melting of at least one component to accomplish bonding, it is restricted to webs with two components like conjugate fibers or those which include an adhesive. In the through-air bonder, air having a temperature above the melting temperature of one component and

15 below the melting temperature of another component is directed from a surrounding hood, through the web, and into a perforated roller supporting the web. Alternatively, the through-air bonder may be a flat arrangement wherein the air is directed vertically downward onto the web. The operating conditions of the two configurations are similar, the primary difference being the geometry of the web during bonding. The hot air melts

20 the lower melting polymer component and thereby forms bonds between the filaments to integrate the web.

As used herein, the term "water dispersible" refers to structure which when placed in an aqueous environment will, with sufficient time, break apart into smaller pieces. As a result, the structure once dispersed may be more advantageously processable in recycling

25 processes or flushable in, for example, septic and municipal sewage treatment systems. If desired, such structures may be made more water dispersible or the dispersion may be

WO 00/59427

PCT/US00/40078

hastened by the use of agitation and/or certain triggering means as are further described below. The actual amount of time will depend at least in part upon the particular end-use design criteria.

As used herein, the term "flushable" means that an item may be successfully
5 transported through a toilet and through the typical municipal sewerage system piping and pumps without incident (i.e.: clogging).

As used herein, the term "biodegradable" means that a material degrades from the action of naturally occurring microorganisms such as bacteria, fungi and algae.

As used herein, the term "personal care product" means bandages and wound care
10 items, diapers, training pants, swimwear, absorbent underpants, adult incontinence products, and feminine hygiene products.

As used herein, the term "pantiliner" means an absorbent feminine hygiene product which is placed in a wearer's panty to absorb bodily fluids. In addition to this commonly understood meaning, the term "pantiliner" is meant to encompass similar products like
15 bandages and wound care items and adult (particularly male) incontinence items. These items are similar in size and function to a pantiliner and therefore are intended to be within the scope of this invention. The term pantiliner shall be used throughout this document as a sort of abbreviation for the wider class of similar products, some of which are mentioned above.

20

DETAILED DESCRIPTION OF THE INVENTION

The present invention is directed to a composite structure, which has a number of different components which are flushable and/or water dispersible. The required
25 components are a body side liner or cover which is adjacent a wearer's body and which initially accepts fluids, a garment side liner or baffle which protects the wearer's clothing from

WO 00/59427

PCT/US00/40078

staining. Optionally, an absorbent core which accepts and holds fluids from the body side liner and which is disposed between the cover and baffle may be used. Additional components like adhesives or peel strips may be added for particular product configurations or methods of construction.

5 The body side facing liner or cover must permit fluids to pass through it and, for flushability, must disperse well from the rest of the components and preferably not float. Since the body side facing liner must allow fluids to pass through it and not disintegrate during use, it must be made from a triggerable polymer. The form of the triggerable polymer is most preferably a fiber, though may be a film or foam.

10 In order to be effective for use in flushable personal care products, the triggerable liner must be functional in use, i.e. maintain integrity in the presence of body fluids, yet dissolve or disperse rapidly in water found in toilets. The main component of the triggerable liner of the present invention is an ion-trigger polymer. An ion-trigger polymer is one whose strength and dispersibility in water is changed depending on a very slight
15 difference in the concentrations of a salt. More specifically, an ion-trigger polymer loses strength and disperses in tap water, but maintains strength and is insoluble in an aqueous solution which contains not less than 0.5% by weight of a neutral inorganic salt comprising a monovalent ion such as NaCl, KCl and NaBr.

It is well known that addition of an inorganic salt to an aqueous solution of a water-
20 soluble polymer may force polymer precipitation through a salting-out phenomenon. For example, anionic polymers such as sodium salts of polyacrylate and carboxymethyl cellulose become insoluble in an aqueous solution of common salt having a concentration of 4 to 5% or higher; non-ionic polymers such as hydroxyethyl cellulose and polyvinyl alcohol (PVA) are insoluble in an aqueous solution only when the concentration of the salt
25 is increased to about 10% or higher. This salting out of a water soluble polymer describes the change from a homogeneous polymer solution to a polymer precipitate. While an ion-

WO 00/59427

PCT/US00/40078

trigger polymer is certainly salt-sensitive, like the simple water-soluble polymers mentioned above, there are several significant differences in the behavior of an ion-trigger polymer for flushable applications. First, the ion-trigger polymer may be sensitive to changes in ion concentration at low levels, such as 0.5% by weight of a common salt. Second, in the aqueous ionic solutions of typical body fluids, the ion trigger polymer is expected not just to be insoluble, but is required to maintain integrity and strength. Finally, the ion trigger polymer loses enough strength or integrity to disperse in tap water; but note that this dispersion does not necessarily require full dissolution, as would be typical with the simple salt-sensitive water-soluble polymers.

10 The feature of integrity and strength in use can be achieved by ensuring a proper "hydrophobic/hydrophilic balance" throughout the polymer chain. As used herein, the term "hydrophobic/hydrophilic balance" refers to a balance of hydrophobic and hydrophilic moieties along the polymer chain, which results in the polymer having a desired trigger property. By control of the hydrophobic/hydrophilic balance in the composition of the polymer, ion-sensitive polymers having desired in-use integrity and water-dispersibility are produced. In contrast, for simple salt-sensitive, water-soluble homopolymers, like polyvinyl alcohol, the hydrophobic/hydrophilic character is fixed by the structure of the monomer, and cannot be adjusted.

20 In one formulation of the triggerable polymer, the ion-trigger character is provided by a sulfonated polyester condensation polymer. The hydrophobic/hydrophilic balance can be controlled by choice of the monomers involved in the condensation reaction. The preparation of such polyesters is generally described, for example, in U.S. Patent Nos. 4,910,292 or 4,973,656.

25 In addition to the sulfonated copolyesters, a variety of other trigger polymers are known in the art. US Patent no. 5,770,528 reveals methylated hydroxypropyl cellulose as an polymer with trigger controlled by temperature and ion concentration. Hydroxypropyl

WO 00/59427

PCT/US00/40078

cellulose itself has some ion-sensitivity, but is more of a temperature-trigger material. Indeed, US Patent no. 5,509,913 lists a variety of polymers, including poly vinyl methyl ether, polyvinyl alcohol and various cellulose polymers with temperature triggers modulated by ion concentration. These temperature-trigger polymers could have limited utility in a triggerable fiber.

Water-soluble, ion-trigger polymers are also known. For example, US Patent no.s 5,317,063 and 5,312,883 reveal acrylic acid or methacrylic acid copolymers that are ion-sensitive. Unfortunately, these materials are not melt processable, and so not amenable to fiber production. Coating an aqueous solution of ion-trigger polymers on a water-insensitive polymer core is also possible.

It is suitable that the body facing liner be made from conjugate fibers in a sheath/core configuration so that the core gives the fibers strength and the sheath bondability. Such fibers may be crimped or crimpable according to US Patent 5,382,400 to Pike et al. One type of fiber to be used as the conjugate fiber has a polypropylene core and an outer sheath consisting of HB Fuller's NP2068 or NP 2074, Atochem's PEBAX MX 1074, Nippon Gohsei's Ecomaty AX10000, National Starch's 8824-71-1, 70-4395, 70-4442 copolyesters and the blends of the polymers mentioned above with some other biodegradable polymers such as aliphatic polyesters. The suitable aliphatic polyesters include, but are not limited to, polybutylene succinate, polybutylene succinate adipate, polyhydroxybutyrate-co-valerate, polycaprolactone, and polylactide and its copolymers, and the 80/20 blend of triggerable conjugate staple binder fibers mentioned above. The conjugate fibers can be blended with other less expensive fibers in a number of known process in order to reduce cost. The conjugate fiber may be blended with less expensive fibers like polyolefins, polyester, rayon, etc., in amount of from about 10/90 to 90/10, or more particularly about 50/50, by any suitable process. Examples of suitable processes include airlaying, coforming, and bonding and carding, after which the fibers may be

WO 00/59427

PCT/US00/40078

bound together by, for example, through air bonding at an appropriate temperature.

Liquid binders may also be used, such as Kymene® 557LX binder available from

Hercules Inc. of Wilmington, DE. The less expensive fibers may be staple fibers which are typically 6 to 12 mm in length and about 1.5 denier so that they will not form long

- 5 strands upon dispersion which could become caught on projections in the waste system piping or other parts of the treatment facility, and cause clogs. The finished body side liner 6 should be in the range of from about 10 to 500 gsm in basis weight or more particularly between about 20 and 30 gsm.

Multicomponent ionically triggerable fibers are provided in US Patent application

- 10 08/730,951, filed October 16, 1996 and which has had the issue fee paid. This provides a polymer fiber in which one component comprises a water dispersible polymer that remains stable in the presence of an aqueous solution having greater than about 1000 ppm of a kosmotrope and disperses in a period not exceeding 30 minutes in an aqueous solution having less than about 1000 ppm of a kosmotrope. In one example in this application, film
- 15 samples formed from National Starch 70-4442 polymer were tested for dispersion in deionized water as compared to commercially available bath tissue, substantially in accordance with "A Simple Test for Dispersion of Wet Chop Fiberglass in Water", published in the 1996 TAPPI Proceedings Nonwovens Conference and incorporated herein by reference. Five 1.5 inch (38.1 mm) long by 1.5 inch (38.1 mm) wide film samples (Sample
- 20 1) having an average weight of 0.2525 gram were placed in 1,500 ml of deionized water having a resistance greater than or equal to 18 megaohms contained in a 2,000 ml Kimax beaker, No. 14005. A Fisher Scientific Stirrer (Magnetic), Catalog No. 11-498-78H, was set at a speed setting of 7 to agitate the contents of the beaker. Using a standard timer, the period of time was measured from the point the stirrer was activated until the onset of
- 25 dispersion occurred, which was defined as the point at which the first piece of sample film material broke off or away from the remaining portion of the film sample, and until full

WO 00/59427

PCT/US00/40078

dispersion occurred, which was defined as the point at which the sample film material had dispersed into pieces having diameters not exceeding about 0.25 inch (6.35 mm).

Five single sheets of Kleenex® Premium Bath Tissue (Sample 2) available from Kimberly-Clark Corp. of Dallas, Texas, each measuring 4.0 inches (10.2 cm) by 4.5 inches (11.4 cm) and having an average weight of 0.3274 gram, were subjected to the same test procedure and the periods for the onset of dispersion and full dispersion were measured.

Finally, this test procedure was repeated by placing a single 1.5 inch (38.1 mm) by 1.5 inch (38.1 mm) sample of film (Sample 3) made from National Starch 70-4442 polymer, having a weight of 0.2029 gram, in 1,500 ml of Blood Bank Saline, 0.85% NaCl, Catalog No. B3158-1 with 0.1% sulfate anion added. The periods for onset of dispersion and full dispersion were measured. As can be seen from Table 1 below, no dispersion occurred for a period of 15 minutes, at which time the test was terminated.

TABLE 1

15

Sample No.	No. of Measurements	Onset of Dispersion (seconds)	Full Dispersion (seconds)
1	5	57.2	82.4
2	5	45.4	122.0
3	1	None after 15 minutes	None after 15 minutes

The results of the test procedures performed under this Example further illustrate that fibers employing the triggered, water-dispersible 70-4442 polymer, in accordance with the present invention, will disperse in the presence of a particular trigger component, such as the sulfate anion, at a concentration level found in excess water, while remain

20

WO 00/59427

PCT/US00/40078

substantially unaffected when exposed to the same trigger component at a concentration level typically found in body fluids, such as infant or adult urine. Moreover, the rate of dispersion compares favorably to that of commercial bath tissue products, which generally are disposed of in normal tap water, such as is found in toilet bowls.

- 5 The absorbent layer, if used, must be capable of absorbing small loadings of menses or other vaginal discharges, and urine. These amounts are generally between 0.25 and 4 grams. The absorbent layer must be triggerably dispersible since it, like the body facing side liner, must be exposed to bodily fluids while in use and not disintegrate. Particularly suitable materials are made by the coform, bonding and carding, or airlaying processes and
- 10 include pulp together with water dispersible polymer binder fibers in a range from about 5/95 to 95/5 weight percent, more particularly about 70/30 weight percent and having a basis weight of from 20 to 600 gsm, more particularly about 190 gsm. Suitable polymers for the coform process include Ecomaty AX10000 from Nippon Gohsei, NP2069 and NP2074 from HB Fuller Company, 1200 Wolters Blvd, Vadnais Heights, MN 55110, PEBAX MX1074 from
- 15 Atochem Inc., 266 Harristown Rd., PO Box 607 Glen Rock NJ 07452 and National Starch's 70-4395, a kosmotrope. A desirable binder fiber for an airaid process is based on a triggered resin; a polymer which is stable in the temperatures, PH and ionic concentrations that are found in body fluids such as urine, menses and blood, but is still soluble in water at the conditions typically found in a toilet bowl, i.e., lower temperatures, moderate pH and
- 20 lower ionic concentrations. A preferred binder fiber is a 50/50 sheath core conjugate fiber with a core of polyolefin, typically polypropylene or polyethylene, and a sheath of a triggerable polymer, which may be a blend. Satisfactory triggerable sheath polymers are blends of copolyesters containing one or more ion sensitive functional groups, such as sulfonate and carboxylate groups and a biodegradable polymer such as an aliphatic
- 25 polyester. The suitable aliphatic polyesters include, but are not limited to, polybutylene succinate, polybutylene succinate adipate, polyhydroxybutyrate-co-valerate.

WO 00/59427

PCT/US00/40078

polycaprolactone, and polylactide and its copolymers. One of the particular polymers which may be used is an 80/20 blend by weight of resin 70-4442 from National starch, with a poly(lactide) copolymer called HeplonE from the Chronopol Corporation of Golden, CO. Another example is an 80/20 blend by weight of resin 70-4442 with a polylactide copolymer
5 called CPX5-2 from the Chronopol Corp. Fibers with a denier of about 3 to 6 and a length of less than 6 mm are preferred.

Suitable pulps for the absorbent include Coosa River (CR) 1654 pulp which is a southern softwood pulp, CR-2054 pulp, and high bulk additive formaldehyde free (HBAFF) pulp which is available from the Weyerhaeuser Corporation of Tacoma, WA under the
10 designation NHB-416 and which is a crosslinked southern softwood pulp fiber with enhanced wet modulus. NHB-416 has a chemical treatment which sets in a curl and twist, in addition to imparting added dry and wet stiffness and resilience to the fiber. Another suitable pulp is Weyerhaeuser's NB-416 southern softwood pulp.

As further illustrations of the trigger behavior integral to the present invention,
15 tensile tests were performed on airlaid and coform nonwoven layers made with trigger binder fibers. The first example is an airlaid structure made solely with binder fiber. In this case the binder fiber was a 50/50 sheath-core of National Starch 70-4442 sheath around a polypropylene core. These fibers were prepared by Chisso Corporation of Japan, with about a 4 denier size and a 6mm length. The fibers were then formed into an
20 airlaid structure of about 33 gsm. The tensile strength of the nonwoven web was then tested dry, after a five minute soak in distilled water, or after a 30 minute soak in 1 weight percent of a sodium sulfate solution. A 2.5 cm by 10.2 cm (one-inch by four-inch) sample of the airlaid web was clamped by the short sides in a Vintrodyne V-1000 mini-tensile tester from Chatillon Corporation of Greensboro, North Carolina, and the peak load
25 measured. For the wet tests, the web, clamps and all, was submerged in a beaker of fluid. Results are reported in Table 2 below in the row labeled "Airlaid".

WO 00/59427

PCT/US00/40078

As a second example of characteristic trigger behavior, a 65/35 pulp/polymer coform was made at about 150 gsm. The bonding polymer was an 80/20 blend of NS 70-4442 and Heplon E mentioned above for the sheath of a trigger binder fiber. The polymer blend was not optimized for the coform process, so formation was poor, but trigger behavior is still evident, as seen in the row labeled "Coform" in Table 2.

As a final example, a sample of airlaid cover and airlaid absorbent thermally embossed together was prepared. The binder was again a trigger 50/50 sheath-core fiber prepared by Chisso, with the polypropylene core surrounded by an 80/20 blend of NS 70-4442 and Heplon E. The 30 gsm cover was a 50/50 blend of the binder fiber and a Nyon fiber (2.2 dtex polyamide from Novalis), while the 120 gsm absorbent was a 70/30 blend of pulp (Weyerhaeuser NB-416) and the binder fiber. In this case the peak tensile strength was measured on an Intellect-II machine on a 2.5 cm by 15.2 cm (one-inch by six-inch) sample, with the samples for the wet tests soaked in a pan of solution and then removed from the pan for testing. Data from these measurements is reported in the row labeled "Cover/Absorbent laminates" in Table 2.

Table 2

Nonwoven	Dry Strength g/in	Salt Strength g/in	Salt soak time	Water Strength g/in	Water soak time
Airlaid	1298	306	30 minutes	131	5 minutes
Coform	539	66	30 seconds	45	30 seconds
Cover/ Absorbent Laminate	295	68	30 second	27	30 seconds

In contrast to the results in Table 2, the spunbond polypropylene cover and the coform absorbent with a polypropylene bonding polymer of the commercially available

WO 00/59427

PCT/US00/40078

Kotex® Lightdays® pantliner from the Kimberly-Clark Corporation, have no trigger behavior, are insensitive to both salt solution and water, and keep essentially the same level of strength dry or wet.

The barrier layer or baffle has been a particular problem for flushability. Currently
5 used polyethylene films are not ideal for a flushable product since, while they will disperse or detach from the product, the film itself does not disperse and they tend to float in water. Polyethylene film can pass entirely through modern treatment facilities intact and be in recognizable form in the treatment plant effluent. Also suitable for use as baffles are nonwoven fabrics and foams.

10 Since it does not absorb bodily fluids or allow them to pass through, the baffle layer need not be triggerably dispersible. The baffle does contact bodily fluids to a degree, however, so if it is not triggerably dispersible it must be protected, by for example, an impermeable coating. The preferred structure is a water soluble or dispersible film with a barrier coating or layer to protect it from contact with bodily fluids.

15 One such dispersible polymer for the baffle layer of the instant invention is a blend of polyethylene oxide (PEO) and ethylene-co-acrylic acid (EAA) in a weight ratio of from about 95/5 to about 20/80, particularly about 80/20. This polymer blend has a density greater than that of water and so will sink, and is also dispersible in water. One source of a suitable polymer blend is Planet Technologies Inc., 9985 Business Park Ave., Suite A, San Diego,
20 CA 92131 as product number PT-P8-200RR9. This particular product number also includes a fragrance capable of surviving melt extrusion. This blend may be extruded into a film using either the cast chill roll or blown bubble processes, which are known in the art, at a thickness range of from 10 to 100 microns. A more particularly suitable thickness is from about 20 to 30 microns. Yet another suitable dispersible but not triggerable polymer is a
25 polyvinyl alcohol such as Ecomaty AX2000 or AX300G supplied by Nippon Gohsei, Higashi Umeda Bldg. 9-6, Nozai-cho, Kita-ku, Osaka 530, Japan.

WO 00/59427

PCT/US00/40078

The baffle layer polymer blend may be co-extruded with another water impervious film layer in the range of about 2 to 4 microns thick. A suitable polymer is EAA like those available from the Dow Chemical Company of Midland MI as Primacor 1430. Another suitable polymer is polycaprolactone like that available from Union Carbide of Danbury, CT as Tone P787. The water impervious layer may also be a trigger polymer such as National Starch's 70-4395 and 8824-71-1. As an alternative to co-extrusion, a water impervious layer on the water soluble portion can be added by a coating process. For example, the PEO film PTP8200RR9 from Planet Technologies Inc. can be slot coated with a 90/10 blend by weight of RT2730 poly alpha olefin from Rexene Products, Dallas, TX and Vybar 253 polymer from Petrolite Polymers, Tulsa OK.

If the baffle layer is not dispersible, triggerably or otherwise, it should at least be biodegradable. If the baffle is biodegradable it can be processed through a waste water facility and will eventually disintegrate. Cellulose based material such as cellulose acetate and aliphatic polyesters such as polybutylene succinate, polybutylene succinate adipate, polyhydroxybutyrate-co-valerate, polycaprolactone, and polylactide and its copolymers are suitable candidates. One example of a suitable material is rayon.

A number of means are available to assemble the layers of this invention. Adhesive bonding is quite satisfactory, as is thermal bonding and embossing. The pant liner of this invention may be embossed or bonded using heat and/or pressure. The embossing may be accomplished using, for example, ultrasonic bonding and/or mechanical bonding as through the use of smooth and/or patterned bonding rolls which may or may not be heated. In addition, production means in which the layers are produced directly onto the preceding layer may be used. Such a production technique, like airlaying, results in the mechanical mixing of fibers in the boundary area of each layer and so holds it together. In short, any means known in the art successfully increase the integrity of the layers such as to produce a unified product which will remain intact through consumer use is acceptable.

WO 00/59427

PCT/US00/40078

Its also desired to provide some means to hold the item in place in the panty while in use. Pantliners have traditionally accomplished this through the use of peel strips which are removed and discarded to reveal a garment adhesive. The product is then applied to the panty with the side having the garment adhesive first.

- 5 This goal can also be reached through the use of (body) heat activated adhesives which remain non-tacky at ambient temperatures but which become adhesive after equilibrating to body temperature. Its possible some small amounts of construction adhesive may be necessary to hold the pantliiner in place until the body heat activated adhesive begins to work. Other mechanical attachment means, such as a patch of
- 10 microhook material which engages the fabric of the undergarment, might also provide an attachment that does not require a peel strip.

In a preferred embodiment of the instant invention, as shown in cross section in the Figure, the invention has a peel strip 1 overlaying a garment attachment adhesive 2 which holds the pantliiner in place on the wearer's panty. The garment adhesive 2 is attached to a

15 barrier film layer or baffle 3 which prohibits transfer of liquids from the pantliiner to the panty. The baffle 3 is adhered to the body facing side which includes an absorbent layer 5 and a body facing liner 6 with a layer of construction adhesive 4. The construction adhesive 4 attaches to an absorbent layer 5 to which is attached a body facing liner 6. Further description of each layer follows below.

- 20 The flushable peel strip 1 may be made from a paper base sheet with a water soluble binder (e.g. polyvinyl alcohol) and a silicone release coating. Such a material is available from Sansei E&M Co., Ltd, No. 18-12, 3-Chome, Roppongi, Minato-ku, Tokyo 106, Japan and from International Paper, Akrosil Division, 206 Garfield Ave., PO Box 8001, Menasha WI 54952-8001. A flushable release strip may also be constructed by putting a thin layer of
- 25 release coating on a water soluble film.

The garment attachment adhesive 2 should be one which will minimize adhesion and

WO 00/59427

PCT/US00/40078

detackify once placed in water. Suitable adhesives may be supplied by National Starch and Chemical Corporation, Funderne Ave., Bridgewater, NJ 08807 as product number 7699-67-2, or by Findley Adhesive Inc., 11320 Watertown Plank Rd., Wauwatosa, WI 53226-3413 as product number H2427(N2). The garment adhesive 2 must be applied in an effective
5 amount by any effective means. One method is by spraying the adhesive 2 onto the baffle 3 1 in an amount of about 20 gsm in a strip about 25 mm wide. The effective amount of adhesive 2 may, of course, vary, based on the type of adhesive used, stiffness of the product, performance requirements, and total area of application. Its believed, however, that the effective amount will vary between about 10 and 60 gsm.

10 The construction adhesive 4 should be one which will release in water to minimize wet rigidity and so enhance the flushability of the product. Suitable polymers include National Starch's product numbers 7699-94-1, 7187-119-2, 8328-122-1 and Findley Adhesives' number H-9186. As with the garment adhesive 2, an effective amount of adhesive must be used. This may be an amount between about 1 and 50 gsm. The adhesive may be applied
15 by any method know in the art.

Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such
20 modifications are intended to be included within the scope of this invention as defined in the following claims. In the claims, means plus function claims are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Thus although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts
25 together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures.

WO 00/59427

PCT/US00/40078

What is claimed is:

1. A water dispersible pantiliner comprising a triggerably dispersible body side facing liner, and a garment side facing baffle.
2. The water dispersible pantiliner of claim 1 further comprising a triggerably dispersible
5 absorbent core disposed between said liner and baffle.
3. The water dispersible pantiliner of claim 2 wherein said absorbent core, liner and baffle are joined together by an adhesive.
4. The water dispersible pantiliner of claim 2 wherein said absorbent core and said liner are joined together by thermal embossing.
- 10 5. The water dispersible pantiliner of claim 2 wherein said garment side facing baffle is biodegradable.
6. The water dispersible pantiliner of claim 2 further comprising a peel strip.
7. The water dispersible pantiliner of claim 6 wherein said peel strip comprises a paper base sheet with a coating of a water soluble binder and a silicone release agent.
- 15 8. The water dispersible pantiliner of claim 3 wherein said adhesive loses its adhesion substantially when placed in water.
9. The water dispersible pantiliner of claim 8 wherein said adhesive comprises a binder which loses its adhesion substantially when placed in water.
10. The water dispersible pantiliner of claim 1 wherein said baffle is comprised of a film of
20 polyethylene oxide and ethylene co-acrylic acid.
11. The water dispersible pantiliner of claim 2 wherein said absorbent core comprises pulp and water dispersible polymer fibers in a range of from 5/95 to 95/5 weight percent.
12. The water dispersible pantiliner of claim 2 wherein said absorbent core comprises staple fibers having average fiber lengths of approximately 18 millimeters or less.
- 25 13. The water dispersible pantiliner of claim 2 which further includes a particulate material within said absorbent core.

WO 00/59427


PCT/US00/40078

14. The water dispersible pantiliner of claim 13 wherein said particulate material is a superabsorbent.
15. The water dispersible pantiliner of claim 13 wherein said particulate material is an odor reducing agent.
- 5 16. The water dispersible pantiliner of claim 1 wherein said liner comprises multicomponent fibers which disperse in a solution having less than 1000 ppm of a kosmotrope.
17. A water dispersible pantiliner consisting essentially of:
- a peel strip comprising a paper base sheet coated with a polyvinyl alcohol binder and silicone release agent, and;
- 10 a water soluble garment attachment adhesive which adhesively attaches said peel strip to a first side of a baffle, said garment attachment adhesive present in an amount between 10 and 60 gsm, and;
- said baffle comprising a blend of polyethylene oxide and ethylene co-acrylic acid in an amount of about between about 20/80 and 95/5 weight percent, and;
- 15 a construction adhesive which adhesively attaches said baffle to an absorbent core which is in turn attached to a body side liner, said construction adhesive present in an effective amount, and;
- said absorbent core comprising pulp and water dispersible polymer fibers in a range of about 5/95 to 95/5 weight percent, and;
- 20 said body side liner comprising crimped water dispersible sheath core conjugate fibers.

WO 00/59427

PCT/US00/40078

1 / 1

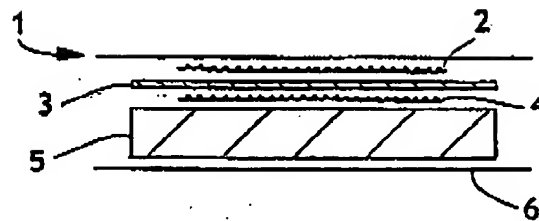

INTERNATIONAL SEARCH REPORT

Int. Appl. No. PCT/US 00/40078	
A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61F13/15 According to International Patent Classification (IPC) or to both national classification and IPC	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61F Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ	
C. DOCUMENTS CONSIDERED TO BE RELEVANT	
Category *	Citation of document, with indication, where appropriate, of the relevant passages
X	US 5 722 966 A (AHR NICHOLAS ALBERT ET AL) 3 March 1998 (1998-03-03) cited in the application abstract; figure 2 column 1, line 6 - line 10 column 1, line 25 - line 59 column 3, line 62 - column 4, line 6 column 4, line 58 - column 5, line 9 column 5, line 55 - line 63 column 13, line 3 - line 12
A	GB 2 295 553 A (ECOPROGRESS LTD) 5 June 1996 (1996-06-05) page 4, line 23 - page 5, line 16; figure 1 page 6, line 6 - line 9 page 8, line 11 - line 15; claim 1 -/-
	Relevant to claim No. 1-3, 5-10, 13, 14, 17 1-17
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.	
<input checked="" type="checkbox"/> Patent family members are listed in annex.	
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "B" document member of the same patent family	
Date of the actual completion of the international search 10 August 2000	Date of mailing of the international search report 22/08/2000
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel.: (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3018	Authorized officer Westermayer, W

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/40078

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 300 358 A (EVERS GLENN R) 5 April 1994 (1994-04-05) abstract column 2, line 56 - line 68 column 4, line 18 - line 21 -----	1-17

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 00/40078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5722966 A	03-03-1998	AU 7388496 A	11-06-1997
		BR 9611614 A	30-03-1999
		CA 2187388 A	23-05-1997
		CN 1207662 A	10-02-1999
		EP 0862402 A	09-09-1998
		JP 11500341 T	12-01-1999
		WO 9718784 A	29-05-1997
		US 5885265 A	23-03-1999
GB 2295553 A	05-06-1996	AU 716418 B	24-02-2000
		AU 4668596 A	27-08-1996
		CA 2212445 A	15-08-1996
		EP 0812170 A	17-12-1997
		WO 9624317 A	15-08-1996
US 5300358 A	05-04-1994	NONE	

Form PCT/ISA 210 (patent family annex) (July 1992)